


GP-600
GEO-SWING

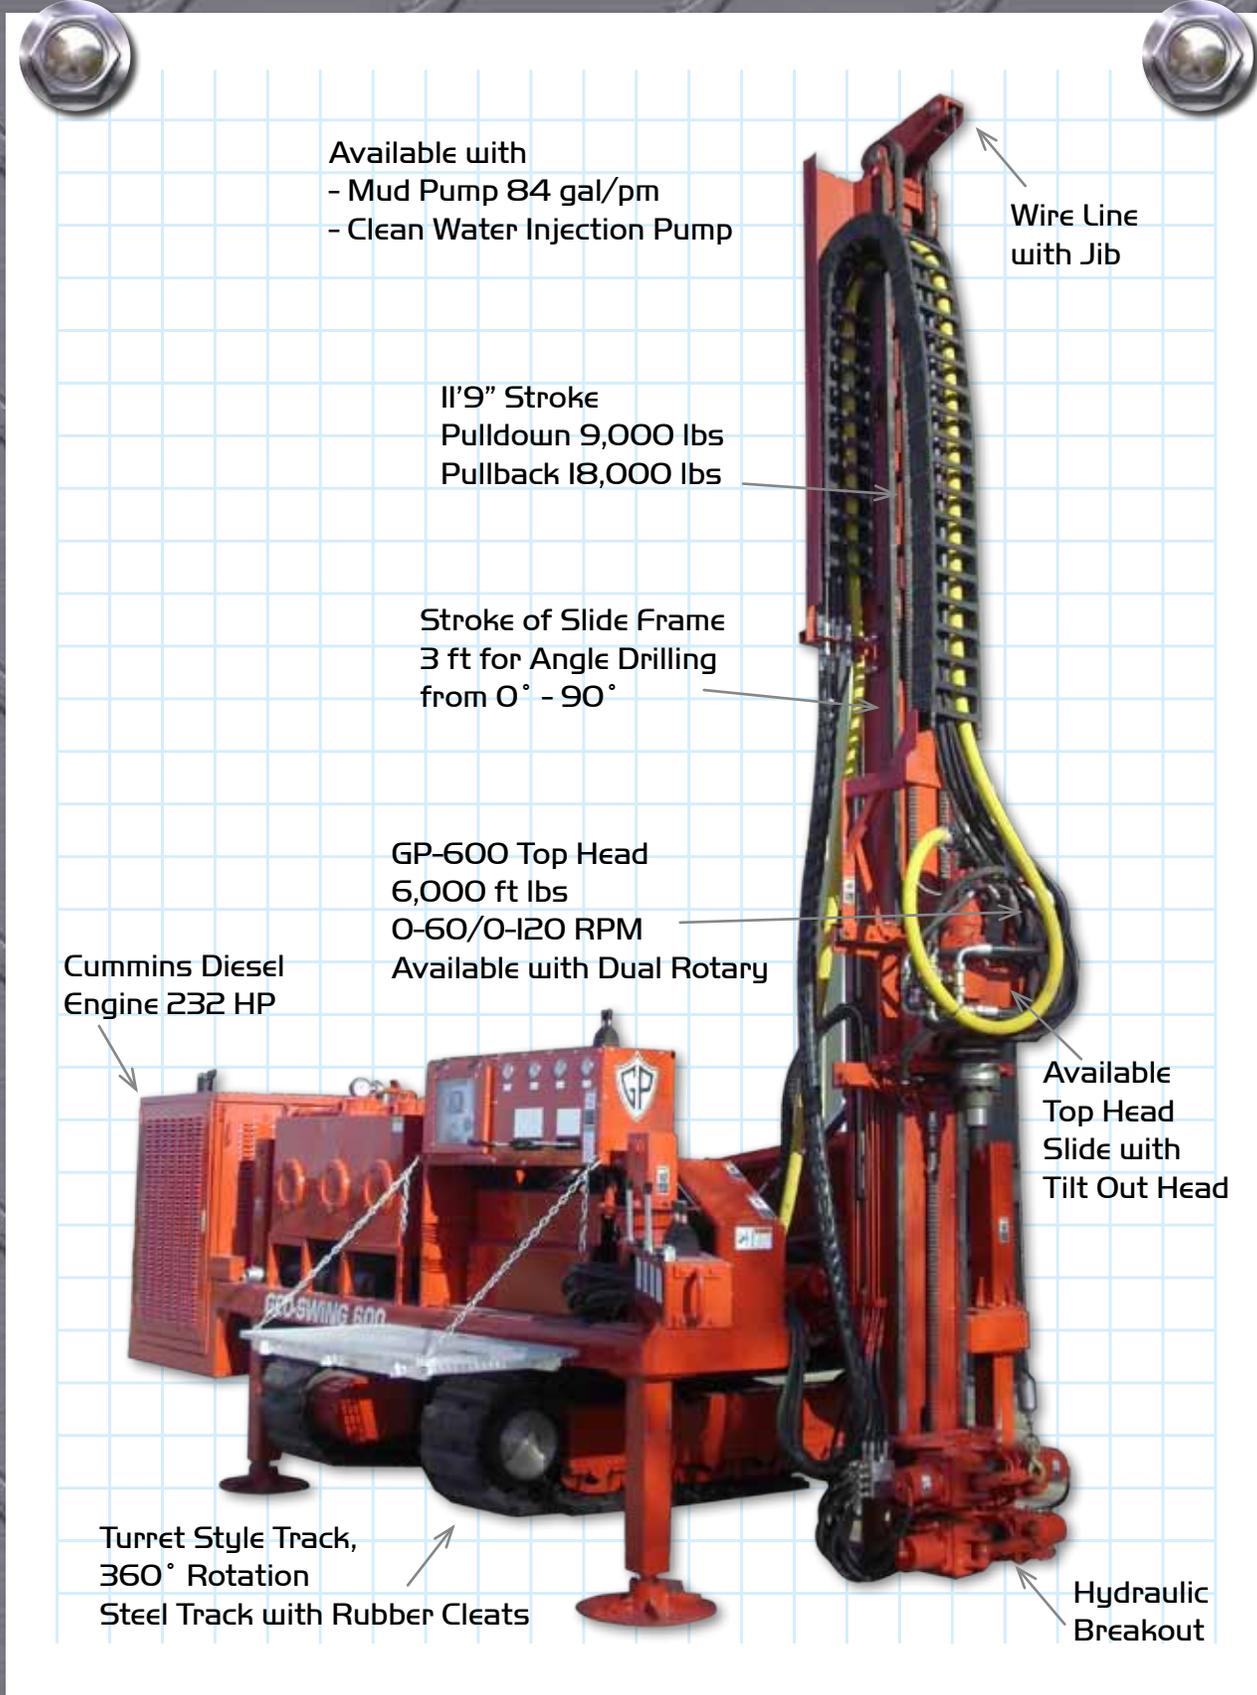

Available with
- Mud Pump 84 gal/pm
- Clean Water Injection Pump

11'9" Stroke
Pulldown 9,000 lbs
Pullback 18,000 lbs

Stroke of Slide Frame
3 ft for Angle Drilling
from 0° - 90°

GP-600 Top Head
6,000 ft lbs
0-60/0-120 RPM
Available with Dual Rotary

Cummins Diesel
Engine 232 HP

Wire Line
with Jib

Available
Top Head
Slide with
Tilt Out Head

Turret Style Track,
360° Rotation
Steel Track with Rubber Cleats

Hydraulic
Breakout



1480 Lincoln Street SW
PO Box 96 • Le Mars, Iowa 51031
712.546.4145 • 800.383.7324
Fax: 712.546.8945
guspech@guspech.com



The GP-600 is part of the Geo-Swing family. With its compact size of only 6.8 ft by 16 ft, it is one of the most versatile track mounted rigs in the geothermal market. The rig is mounted on a turret style track system, which allows drilling and maneuverability in confined spaces without leaving a heavy footprint.

With a capability of drilling horizontal to vertical 0 - 90 can be utilized for anchoring, jet grouting and geothermal.

AVAILABLE OPTIONS

- Mud Pump
- Clean Water Injection Pump
- Top-Head Slide
- Dual Rotary
- Rubber Tracks
- Remote Operation For Travel

